

# PoE Extender




Outdoor use weather-proof  
Single port PoE extender

## Features

- Industrial Grade -40 to 70°C
- Mini-size, wall mounting
- Requires no external power supply
- Low power consumption, only 1.2W
- Auto-sensing PoE devices
- Compatibility with 802.3at and 802.3af

Outdoor use weather-proof Single port PoE extender- a quality product for PoE network point-to-point up to 500m. Works with PoE standards IEEE802.3af and IEEE802.3at. This device serves as a data switch port that is powered by PoE, and transmits it further on another 100m together with the data. Depending on the amount of power consumption, may use up to 4 extensions in the same chain, thereby increasing transmission distance up to 500m (1 class 82.3af, see table. "Maximum distance")

## Typical connection diagram

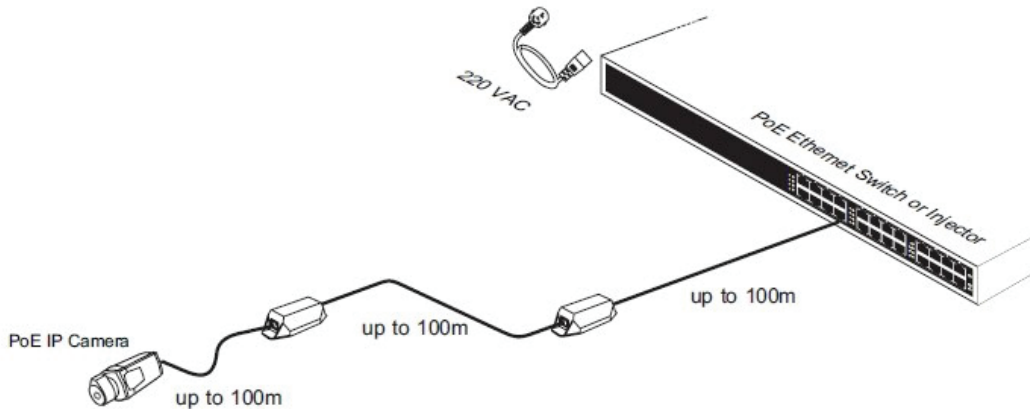

PoE Device (PD)	PoE Injector or Switch IEEE802.3af (max 15.4W)	PoE Plus Injector or Switch IEEE802.3at (max 30W)
IEEE802.3af class 1 no more than 4W	400m (3pcs PoE Extender)	500m (4pcs PoE Extender)
IEEE802.3af class 2 no more than 6W	300m (2pcs PoE Extender)	400m (3pcs PoE Extender)
IEEE802.3af class 0&3 no more than 12W	200m (1pcs PoE Extender)	300m (2pcs PoE Extender)
IEEE802.3at no more than 22W	Not applicable	200m (1pcs PoE Extender)

## Ordering Information

SV-EXT-POE+

Starview Outdoor 10/100/1000Base-T 1-port PoE+ enabled Extender

## Technical characteristics

Item	Description
No. of channels	1
Pass Through Data Rates	10/100/1000 Mbps half / full duplex
PoE input	Pin Assignment and Polarity: Both 1/2 (-), 3/6 (+) and 7/8 (-), 4/5 (+)
PoE output	Pin Assignment and Polarity: 1/2 (-), 3/6 (+)      Output Power: up to 22W
Indicators	Power indicator: PoE enabled      Network indicator: Link/Act
Connectors	Shielded RJ-45, EIA 568A and 568B
Network cables	Shielded category 5 (or higher)
Dimensions	185mm x 45mm x 45mm
Weight	0.22Kg
Mounting	Wall of shelf
Environment	Indoor or Outdoor
Environmental Conditions	Operating Ambient Temperature: -25 to 55°C Storage Temperature: -30 to 70°C
Compliance	IEEE802.3af (POE), IEEE802.3at (POE+)

## Maximum Distances for Power Sources

Multiple PoE Extenders can be connected every 100 meters to obtain greater distances. The actual figures depend on operating conditions. The range is over 24 AWG or heavier Cat-5e or Cat-6 cable except where specified.

Examples for medium power PoE Devices (that are PoE Class 2, or require under 6 watts)

PoE Source			
PoE switch (802.3af, Output voltages 50V)	15W mid-span (802.3af, Output voltages 50V)	PoE+ switch (802.3at, Output voltages 50V)	30W mid-span (802.3at, Output voltages 50V)
<b>Maximum Distances</b>			
300m	300m	400m	400m

Examples for full power PoE Devices (that are PoE Class 0 or 3, or require under 12 watts)

PoE Source			
PoE switch (802.3af, Output voltages 50V)	15W mid-span (802.3af, Output voltages 50V)	PoE+ switch (802.3at, Output voltages 50V)	30W mid-span (802.3at, Output voltages 50V)
<b>Maximum Distances</b>			
200m	200m	300m	300m

Examples for PoE+ Devices (that are PoE Class 4 that under 22 watts, or 802.3at compliant)

PoE Source			
PoE switch (802.3af, Output voltages 50V)	15W mid-span (802.3af, Output voltages 50V)	PoE+ switch (802.3at, Output voltages 50V)	30W mid-span (802.3at, Output voltages 50V)
<b>Maximum Distances</b>			
Not applicable	Not applicable	200m	200m